



# FMAMP1K-R

## 1000 W - FM Amplifier

Designed for FM radio transposers and transmitters, this amplifier incorporates microstrip technology and LDMOS device to enhance ruggedness and reliability.

- 87.5 ÷ 108 MHz
- 48 Volts
- Input/Output 50 Ohm/50 Ohm
- P<sub>out</sub> : 1000 W min
- I<sub>quiescent</sub> 200mA
- Gain : 22 dB typ
- High linearity. Digital operation ready
- Devices: last LDMOS generation
- Single End Configuration
- Over drive self protected
- Output High Mismatch self protected




This picture is a mere example, it does not bind the provided product

### ABSOLUTE MAXIMUM RATINGS (Base Plate T = 65 °C)

Symbol	Parameter	Value	Unit
V <sub>S</sub>	Drain Voltage Supply	55	V dc
I <sub>S</sub>	Supply Current	40	A dc
VSWR	Load Mismatch (all phase angles, T <sub>c</sub> =40 C, I <sub>d</sub> =10A)	3:1	
T <sub>stg</sub>	Storage Temperature Range	-30 + 100	°C
T <sub>c</sub>	Operating Temperature	-10 +50	°C

### ELECTRICAL SPECIFICATIONS (Base Plate T. = 45 °C, 50 Ohm loaded, V<sub>d</sub> = 48 V)

ELECTRICAL CHARACTERISTICS				
Characteristics	Min	Typ.	Max	Unit
Operating Frequency Range	87.5		108	MHz
Fundamental Output Power	1000			W
Power Input		5	8	W
Power Gain (1000W output)	20.5	22		dB
I Drain		30	36	A
Collector Efficiency (Load 50 Ohm)	69	74		%
Input VSWR		1.3:1	1.7:1	
Insertion Phase Variation (Unit to Unit)		±10		Degrees
Power Gain Variation (Unit to Unit)		±1		dB
F2 Second Harmonic	-35	-40		dB
F3 Third Harmonic		-40		dB

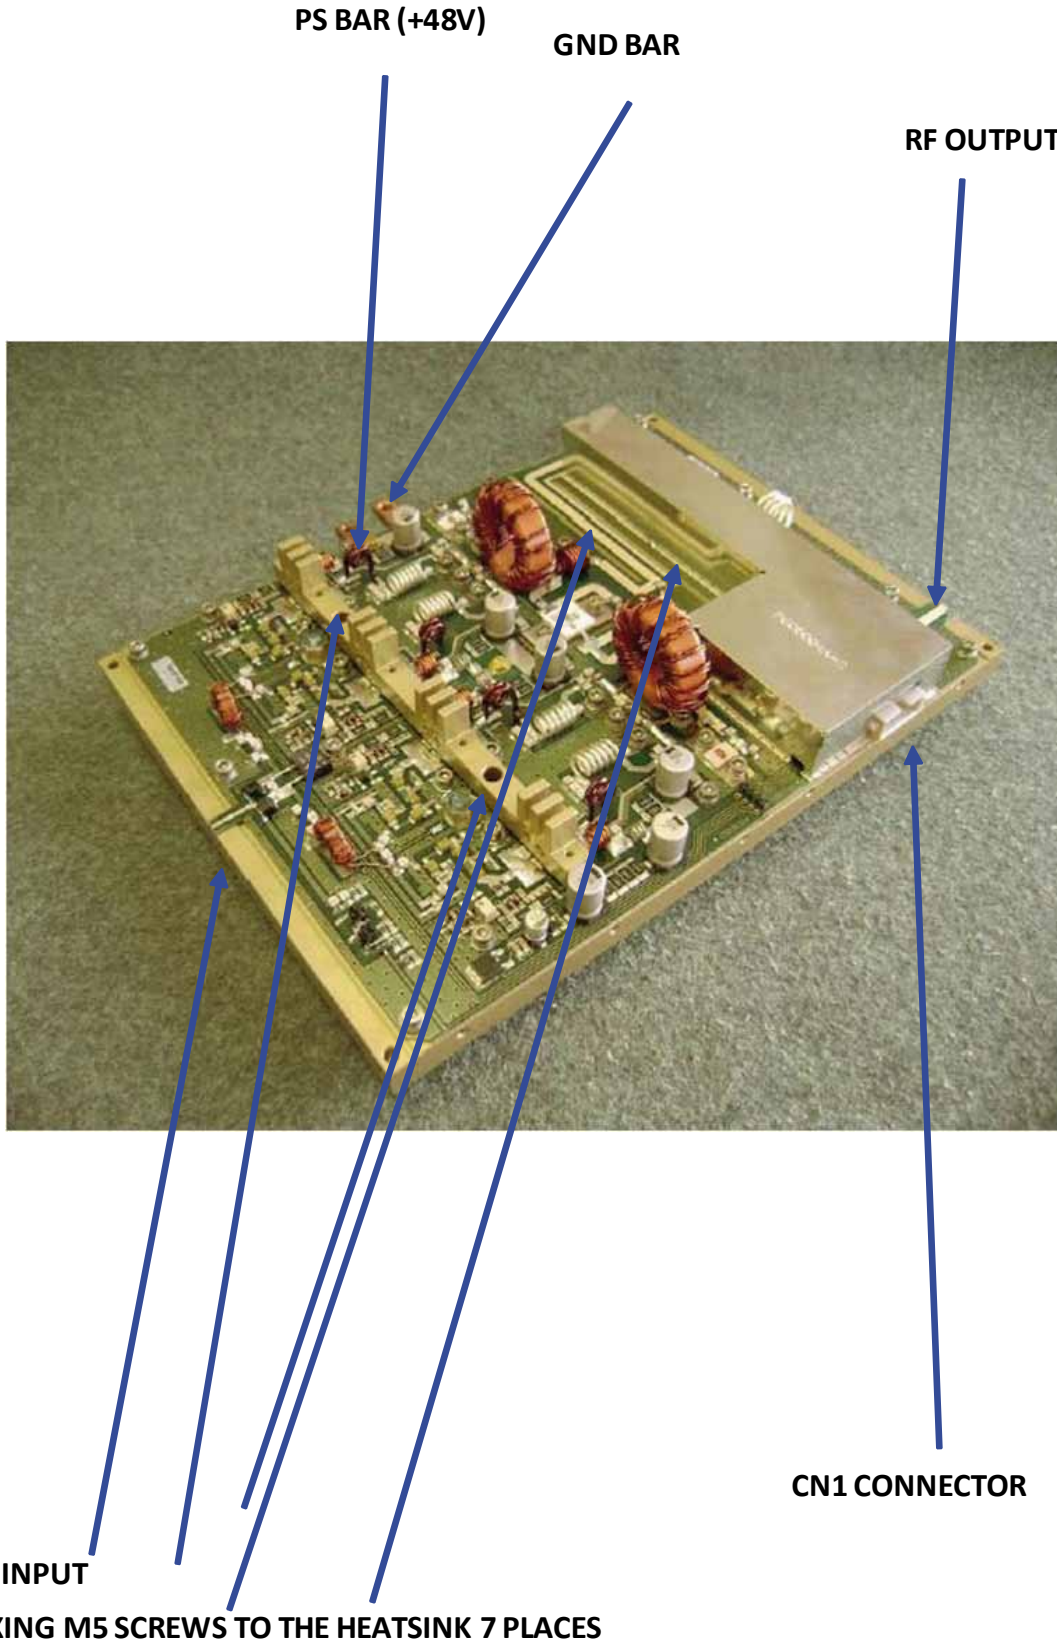



# FMAMP1K-R

## PIN FUNCTION TABLE

CN1	Function	Note / Parameters
Pin 1	Ground	
Pin 2	Ground	
Pin 3	Ground	
Pin 4	Ground	
Pin 5	Maximum Reflected Power	Factory setting = 100W. / 5V = Alarm; 0V = OK
Pin 6	Input Level	
Pin 7	Output Power	DC directly related to the O/P with +/- 5% Accuracy
Pin 8	Reflected Power	DC directly related to the R/P with +/- 5% Accuracy
Pin 9	Maximum Output Power	Factory setting = 1100W. / 5V = Alarm; 0V = OK
Pin 10	Heatsink temp	DC directly related to temp. with +/- 5% Accuracy
Pin 11	RF Enable	At +5V the O/P is reduced by 10dB
Pin 12	Maximum Heatsink temperature	Factory setting +65C. / 5V = Alarm; 0V = OK
Pin 13	PA working properly:	5V = OK; 0V = Alarm
Pin 14	Overdrive	Factory setting 8W P/Input. / 5V = Alarm; 0V = OK

## PHYSICAL LAYOUT AND HEATSINK MOUNTING/HARDWARE

### 1. HEATSINK TOOLING

- Planarity: typical value 0.8 $\mu$
- Roughness: better than 0.03 mm

### 2. THERMAL COMPOUND


- Paste with silicones
- Thickness: optimum between 0.06 mm and 0.15 mm, on the whole back surface of the amplifier.



### 3. SCREWS

- M3 and M5 x 30 hexagon socket head cap screws.
- The recommended Torque is 0.9 N-m for M3 or 4-40 type screws and 1.3 N/m for M5 x 30.
- The screw tightening must be done at ambient temperature.


### 4. TIGHTENING ORDER

- See next figure:

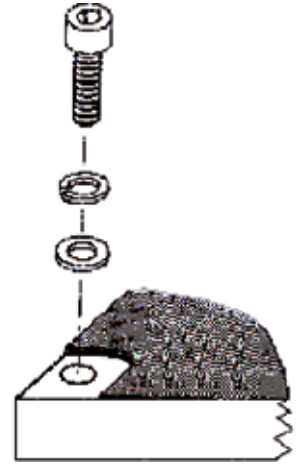

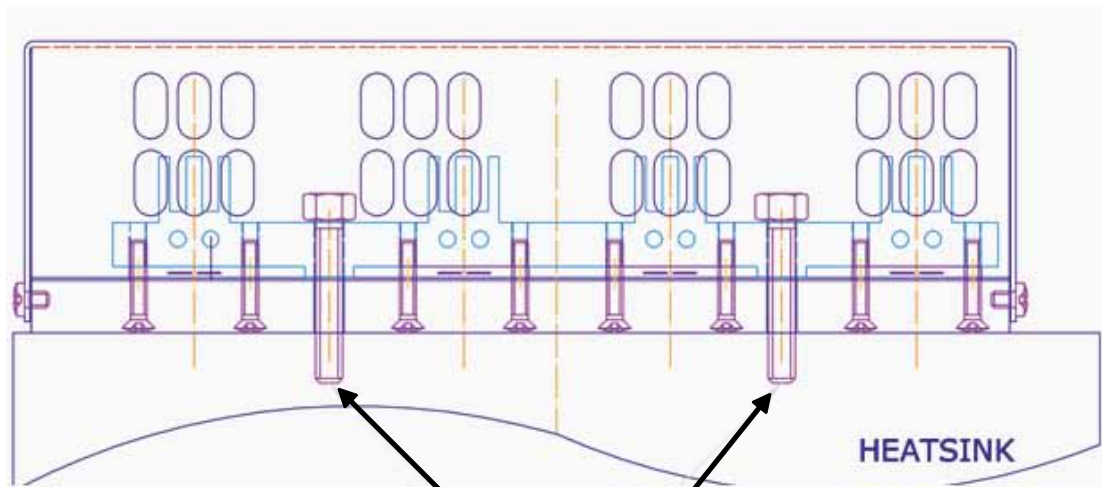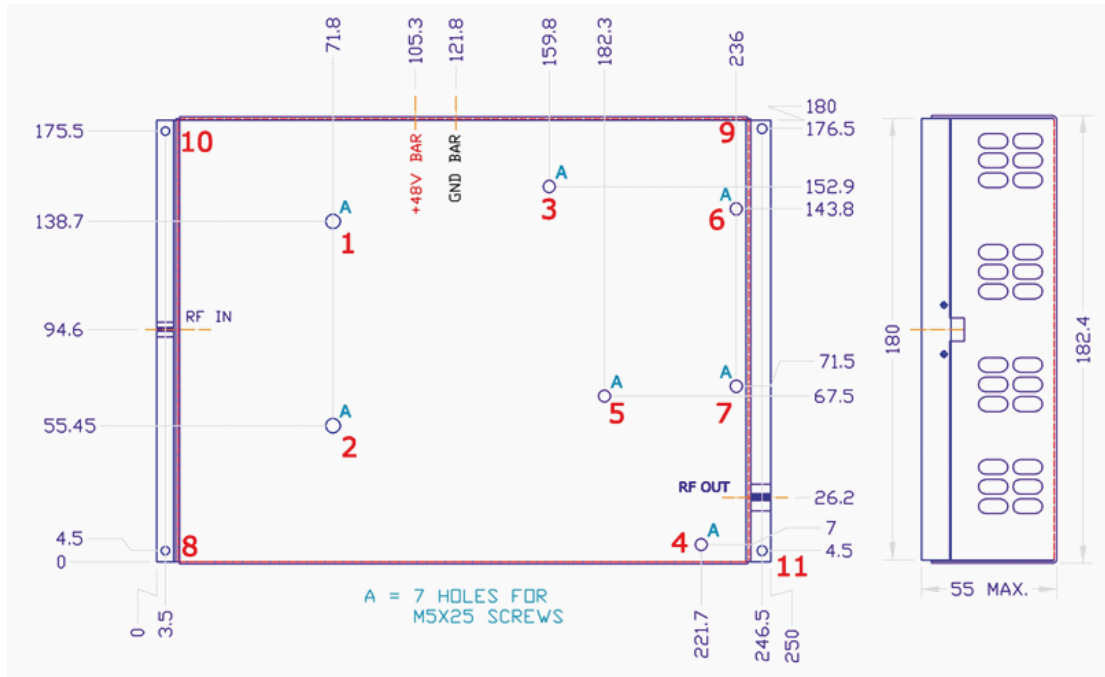

M5 X 25 SCREWS (7 PLACES)

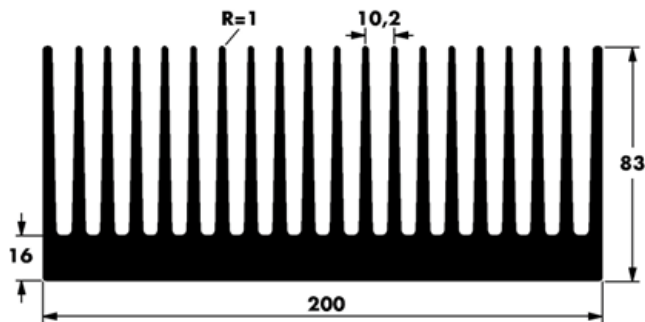

SUGGESTED HEATSINK:

Model: PADA 8320 or equivalent

Dimensions: 200x250x83 [mm]



# FMAMP1K-R

## IMPORTANT NOTICE

ONAIR MEDYA RESERVE THE RIGHT TO MAKE CHANGES TO THE PRODUCT(S) OR INFORMATION CONTAINED HEREIN WITHOUT NOTICE. ONAIR MEDYA ASSUMES NO RESPONSIBILITY FOR ANY ERRORS WHICH MAY APPEAR IN THIS DOCUMENT.

WARRANTY INFORMATION APPLICABLE TO THE PRODUCT IDENTIFIED HEREIN IS AVAILABLE UPON REQUEST. NOTHING CONTAINED HEREIN SHALL CONSTITUTE A WARRANTY, REPRESENTATION OR GUARANTEE OF ANY KIND. ONAIR MEDYA EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND/OR IMPLIED INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, AND OF FITNESS FOR A PARTICULAR PURPOSE, USE OR APPLICATION.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of ONAIR MEDYA.

## WARNING

ONAIR MEDYA PRODUCTS ARE NOT INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS. USE OF ONAIR MEDYA PRODUCT IN ANY SUCH APPLICATION WITHOUT WRITTEN CONSENT IS PROHIBITED.