


1 Connector description

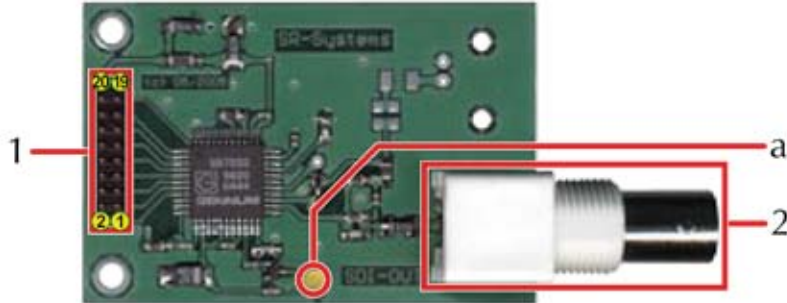

board dimensions: 40×60 mm

Connectors and LEDs		
1	20pin Header	Connection to smartMPEG Lite Decoder
2	BNC Connector 75 Ω	SDI out
a	LED yellow	27 MHz Lock on

2 Pin description

1 – smartMPEG Lite Dec.			
1	D0	2	GND
3	D1	4	GND
5	D2	6	GND
7	D3	8	GND
9	D4	10	GND
11	D5	12	GND
13	D6	14	GND
15	D7	16	GND
17	H-Clock	18	not connected
33	27 MHz	34	5.0 V DC